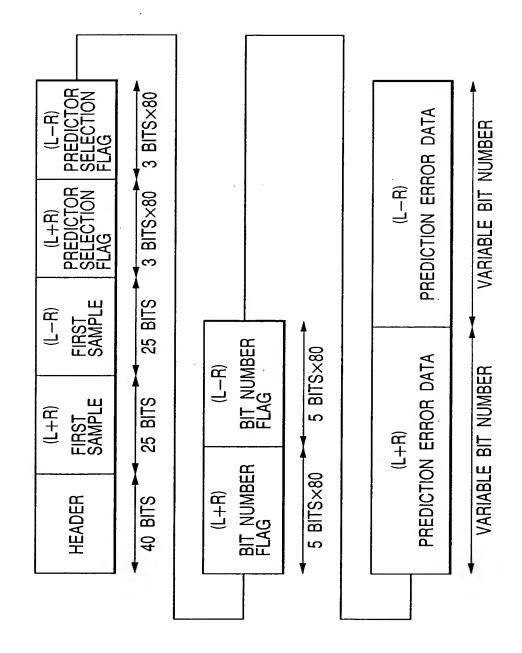
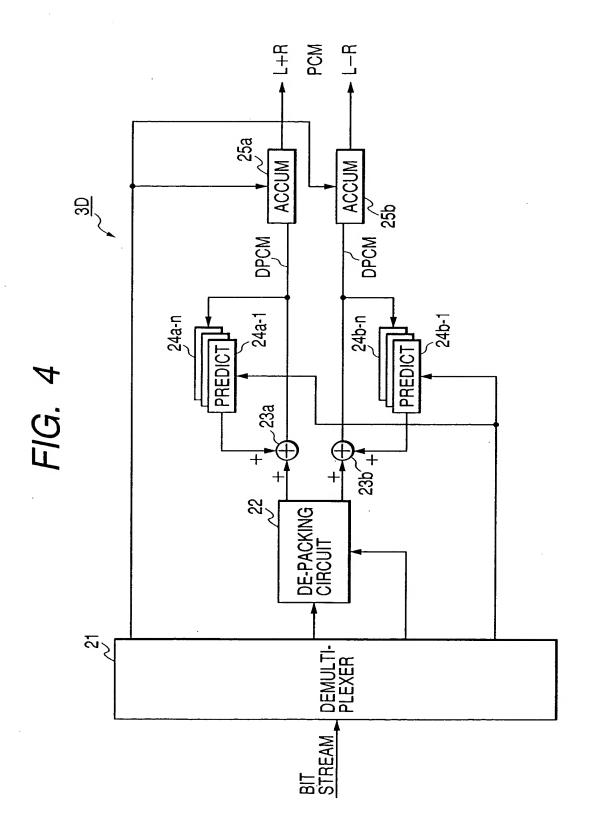
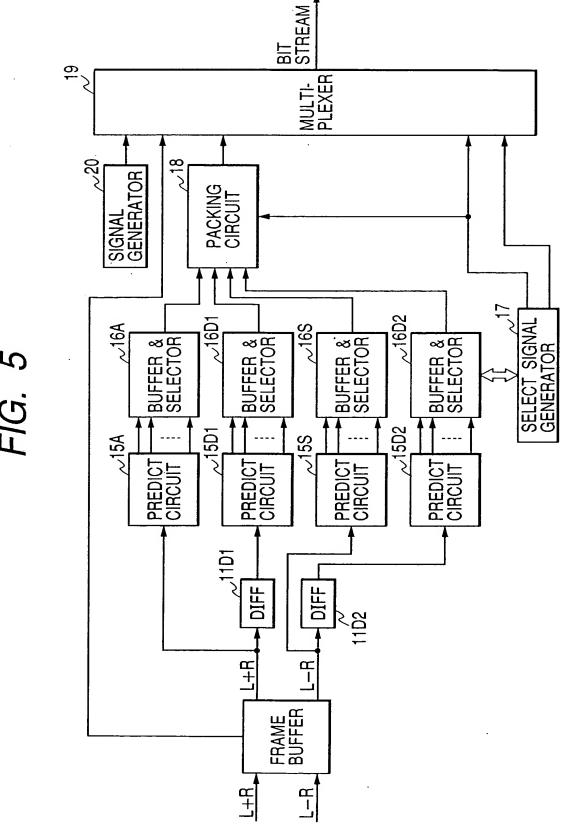


FIG. 3







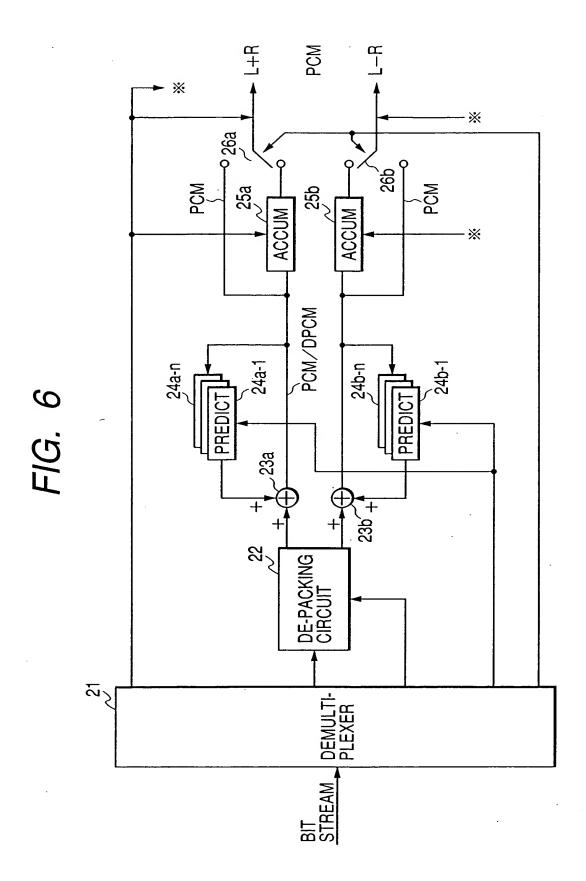
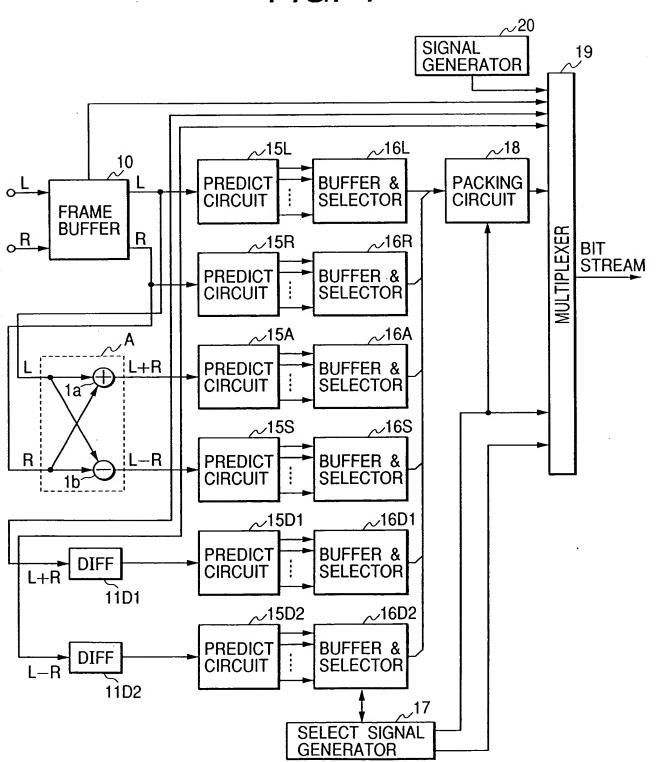


FIG. 7



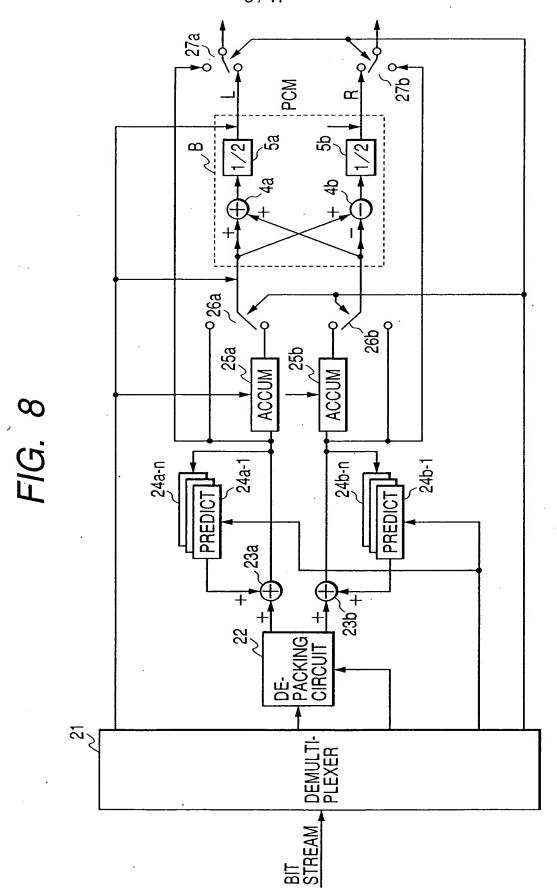


FIG. 9

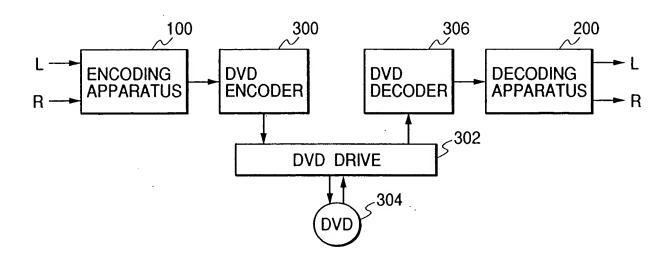


FIG. 10

AUDIO PACK

			2048	BYTES
PACK START (4)	SCR (6)	MUX RATE (3)	STUFFING (1)	USER DATA (PACKET) (2034)
PACK HEADER (14)				

FIG. 11

_				1
AUDIO PACK			AUDIO DATA (LINEAR) (PCM	1—2011 BYTES
			STUFFING BYTE	0—7 BYTES
			AUDIO DATA INFORMATION (ADI)	8 BYTES
	AUDIO PACKET	PRIVATE HEADER	FIRST ACCESS UNIT POINTER	2 BYTES
	AUDIO	PRIVAT	PRIVATE HEADER LENGTH	1 BYTE
			ISRC	2 BYTES
			SUB STREAM ID	1 BYTE
		<u> </u>	PACKET HEADER	17, 9 OR 14 BYTES
			PACK HEADER	14 BYTES

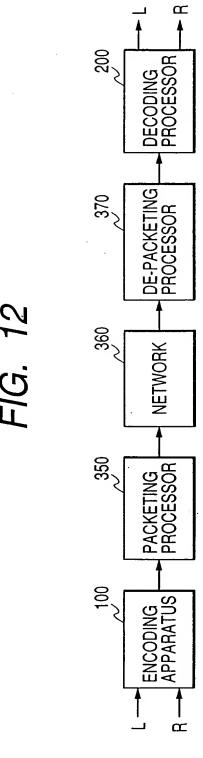


FIG. 13

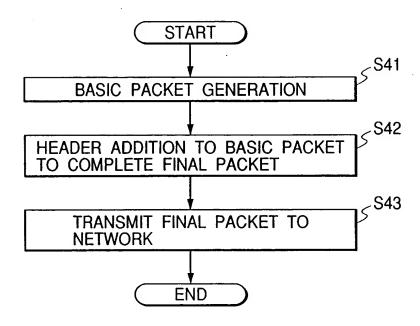
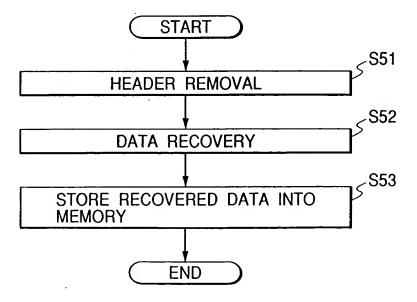


FIG. 14



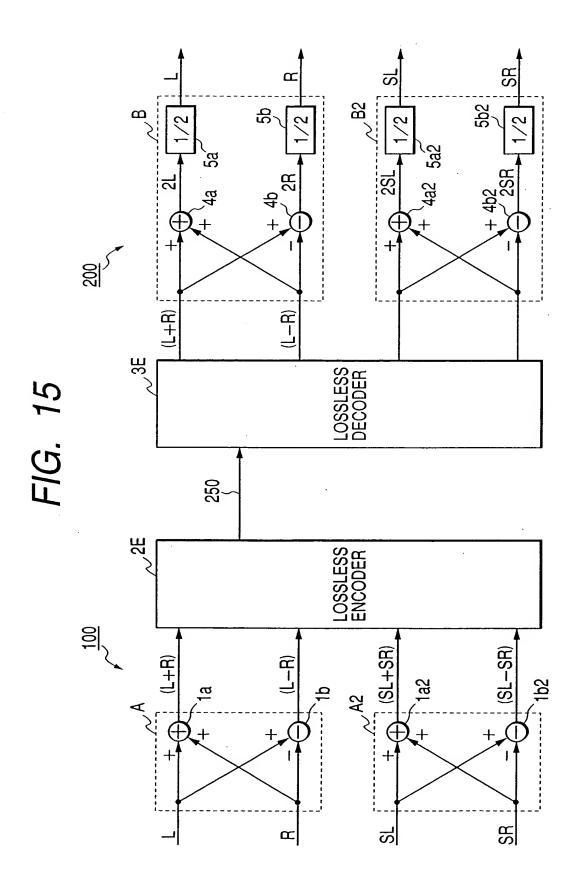


FIG. 16

HEADER	(L+R) (L-R)	(SL+SR) (SL-SR)

FIG. 18

HEADER	(L+R) (L-R)	C, SL, SR, LFE
--------	-------------	----------------

